




DESCRIPTION

756R

Straight micrometric radiator lockshield valve, union tail with O-Ring included. Compression end. Nickel-plated. Without fittings (Art. **3015 – 3015SCR – 3625 – 3525**)

DIMENSIONS

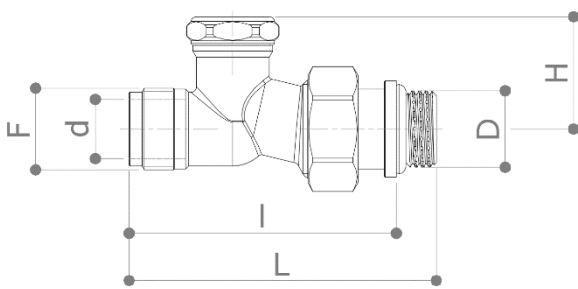

D x d	3/8" x 16	1/2" x 16	1/2" x 18
F	∅ 22-19 th. x 1"	∅ 22-19 th. x 1"	∅ 23-19 th. x 1"
H	30.5	30.5	30.5
L	78	83	83
I	68	72.5	72.5
Weight [g]	170	200	200

Dimensions in mm

All threads are conform to ISO 7 or ISO 228 standards.

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Tail	CW617N (EN 12165) CuZn40Pb2
Nut	CW617N (EN 12165) CuZn40Pb2
O-ring	EPDM
Lock	CW614N (EN 12164) CuZn39Pb3
Cap	CW614N (EN 12164) CuZn39Pb3

RECCOMANDED PRESSURE / TEMPERATURE LIMITS


10 bar - 100°C - non shock

Nominal pressure: 10 bar

APPROVALS



PRESSURE DROP DIAGRAM

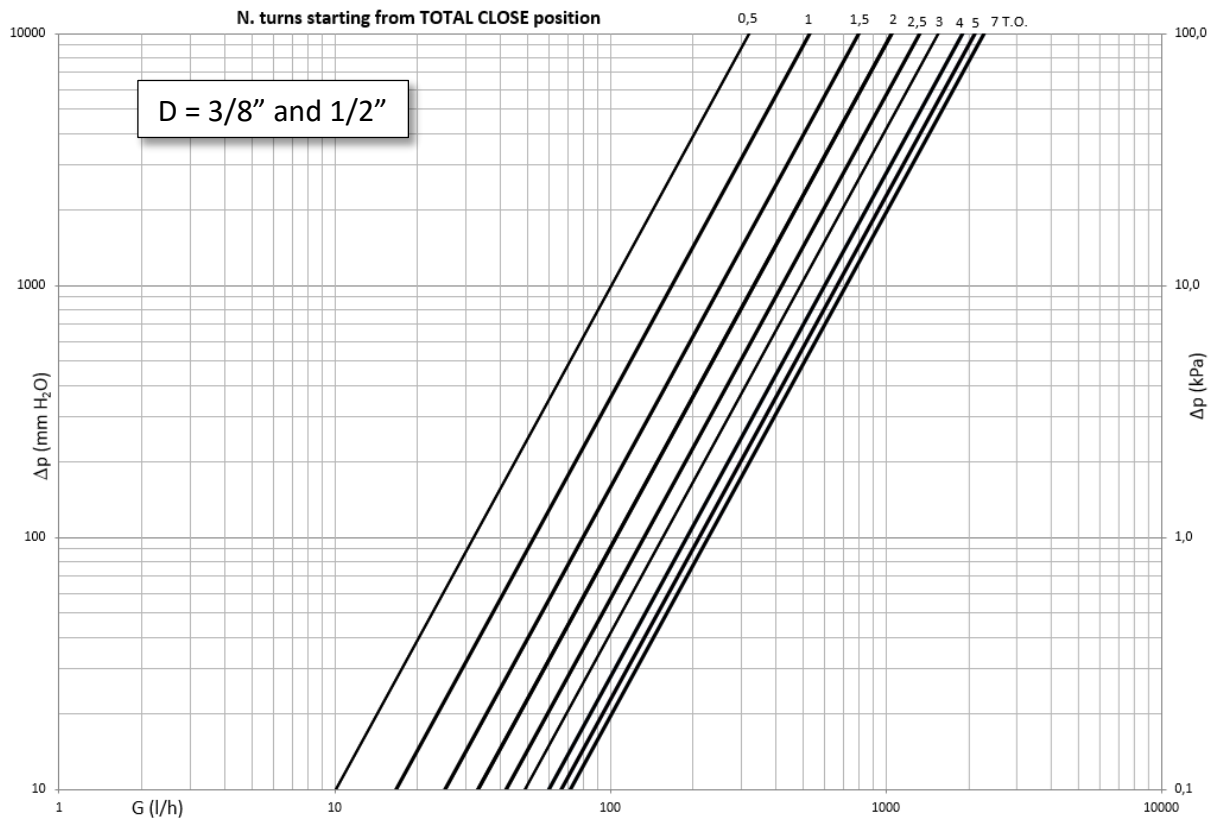

Turns	0.5	1	1.5	2	2.5	3	4	5	7 T.O.
Kv	0.32	0.53	0.80	1.05	1.33	1.55	1.9	2.11	2.27

T.O.: Total Open