



DESCRIPTION


763R

Straight micrometric radiator valve, with thermostatic option or thermo-electric control. Female end. Radiator connection: union end with O-Ring.

Connection to actuator: **M28 x 1.5 mm**

Nickel plated.

DIMENSIONS

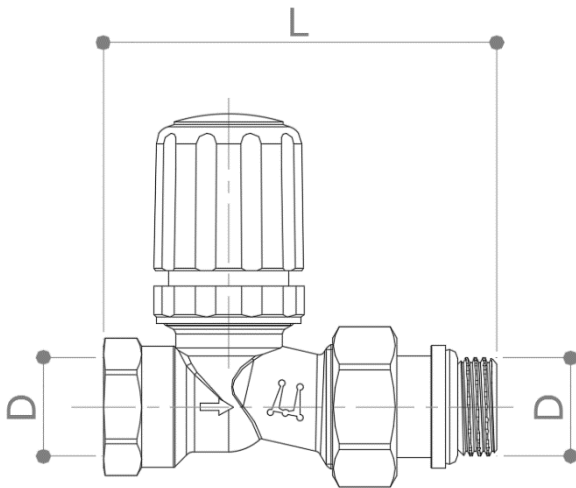

D x d	3/8"	1/2"
L	73.5	81
Weight [g]	200	250

Dimensions in **mm**
All threads are conform to ISO 7 standard

MATERIALS

- Body** CW617N (EN 12165) CuZn40Pb2
- Union** CW617N (EN 12165) CuZn40Pb2
- Nut** CW617N (EN 12165) CuZn40Pb2
- Stem** AISI303
- Headwork** CW614N (EN 12164) CuZn39Pb3
- Stuffing box** CW614N (EN 12164) CuZn39Pb3
- O-Rings** EPDM-X – EPDM
- Handwheel** ABS

PRESSURE DROP DIAGRAM

Straight

$$\Delta P = \left[\frac{Q}{Kv} \right]^2$$

$$Q = Kv * \sqrt{\Delta P}$$

Where

Q is the flow rate [m³/h]


Kv is the flow rate factor [m³/h]

ΔP is the pressure drop across the valve [bar]

$$q_{mNH} = 175 \text{ kg/h}$$

$$a = 0.81$$

ΔT [°C]	Kv	
	3/8"	1/2"
1K	0.28	0.28
2K	0.54	0.54
T.O.	1.30	1.30

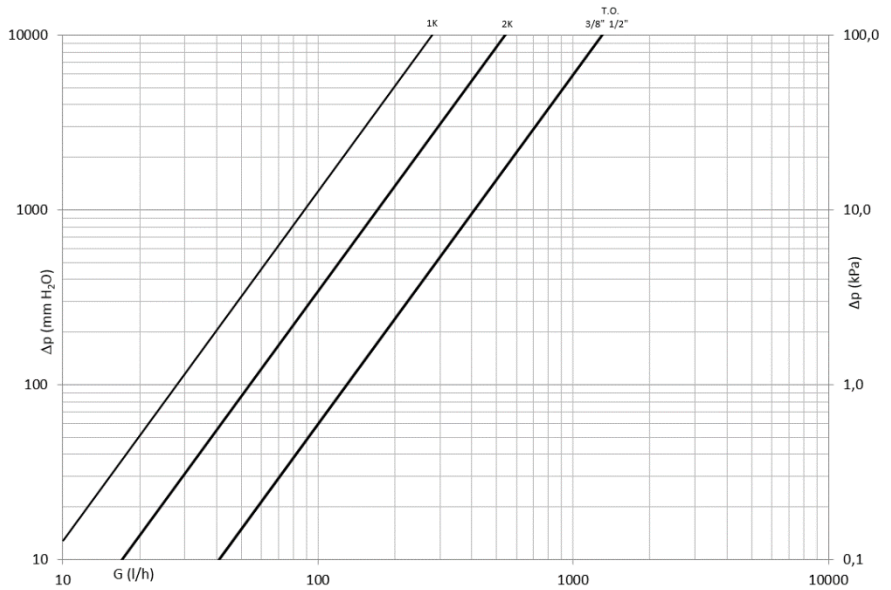

T.O.: Total Open

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar – 110°C – non shock

AVAILABLE THERMOSTATIC HEAD

106CN



107L



108L



EN215 n°49

109L



EN215 n°49

Additional options are available.